


# Data Sheet

Itemnumber....: 3240800308

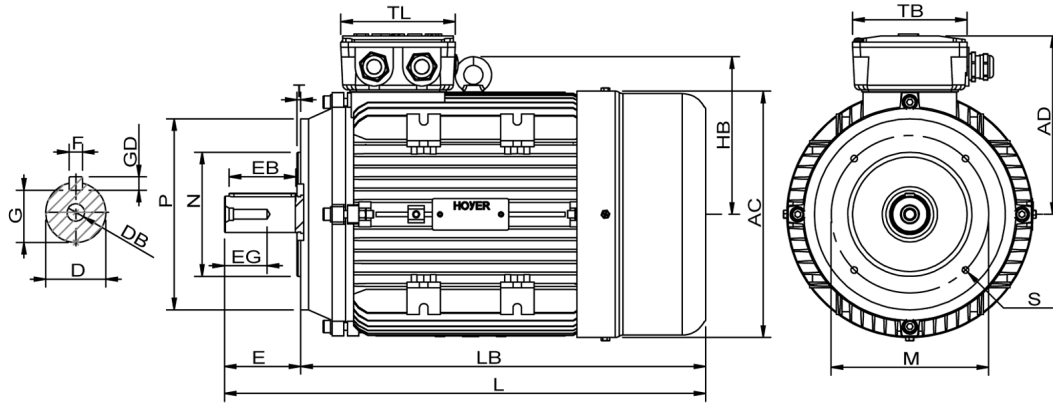

AC = 159	DB = M6	EG = 16	GD = 6	M = 100	S = 4-M6	TL = 100
AD = 126	E = 40	F = 6	L = 294	N = 80	T = 3	
D = 19	EB = 32	G = 15,50	LB = 254	P = 120	TB = 100	

<p><b>Version</b>                  Type.....: HMA2 80 1-4                  Design.....: Induction motor                  Standard series.....: IEC 60034                  Phase / Voltage range.....: 3~ / Low</p> <p><b>Electrical design</b>                  Efficiency.....: IE2                  Pole.....: 4                  Power at 50 Hz (kW).....: 0,55                  Hz.....: 60 (60 Hz output)                  Voltage.....: 440VY                  Winding voltage.....: 230VD/400VY 50 Hz                  Power output (kW).....: 0,64                  Duty.....: S1                  Insulation class.....: F                  Temperature rise.....: B</p> <p><b>Motor protection</b>                  Thermal protection main.....: PTC 3x 155 dgr                  Thermal protection second..: None                  Space heater.....: None                  Temperature detector.....: No                  SPM.....: No                  IR wire.....: No                  Tropical insulation.....: Yes</p> <p><b>Explosion protection</b>                  According to.....: None                  Type of protection.....: None</p> <p><b>General</b>                  Direction of rotation.....: CW                  Painting.....: RAL 9005                  Nameplate.....: Multivoltage + VFD                  Special packing.....: No                  Special requirements.....: No</p>	<p><b>Mechanical design</b>                  Frame size.....: 80                  Mounting.....: B14                  B14 M measure.....: 100                  Rain cap.....: No                  Protection class.....: IP55                  Cooling method.....: IC411/TEFC                  External grounding.....: Yes                  Drain hole.....: Yes                  Frame material.....: Aluminium                  Material approval.....: None                  Shaft.....: IEC standard                  Key.....: Closed key                  Balancing.....: Half key balancing                  Vibration class.....: Grade-A                  Weight (kg).....: 10,00</p> <p><b>Environment condition</b>                  Ambient temp. min. (°C)..: -20                  Ambient temp. max. (°C)..: 45                  Altitude (mtr up to).....: 1000</p>	<p><b>Bearing</b>                  DE Bearing.....: 6204-ZZ/C3                  NDE Bearing.....: 6204-ZZ/C3                  Fixed bearing.....: DE</p> <p><b>Terminal box</b>                  Tbox position.....: Top                  Cable entry direction.....: Right (from DE)                  Cable entry                      Main.....: 1 x M20x1,5                                      Ø8-13mm metal                  Accessory.....: 1 x M20x1,5                                      Metal blindcap                  Terminal board thread.....: 6-M4</p> <p><b>Test values</b>                  Rotor inertia (kgm<sup>2</sup>).....: 0,0020                  Noise level (dB(A)).....: 56                  No load current (A).....: 1,00                  Winding resist. (ohm).....: 10,4                  Starting time (sec.).....: 0,00                  Temp. rise winding (K).....: 50                  Temp. rise surface (K).....: 51</p>
---	--	---

Rated power (kW) . . . . .	0,55	0,53	0,66	0,64
Frequency (Hz) . . . . .	50	50	60	60
Voltage (V) . . . . .	230 400	220 380	280 480	440
Connection . . . . .	D Y	D Y	D Y	Y
Full load current (A) . . . . .	2,50 1,44	2,60 1,50	2,50 1,44	1,50
Speed (rpm) . . . . .	1440	1440	1730	1730
Power factor cos(phi) . . . . .	0,71	0,73	0,71	0,76
Efficiency, 100/75/50 (%) . . . . .	77,1/ 77,9 /75,8	77,1/ 77,9 /75,8	77,1/ 77,9 /75,8	75,5/ 76,3 /74,1
Ist/In . . . . .	5,90	5,20	5,90	5,45
Full load torque (Nm) . . . . .	3,65	3,55	3,65	3,55
Tst/Tn . . . . .	2,65	2,44	2,65	2,28
Tmax/Tn . . . . .	2,60	2,42	2,60	2,26
Duty . . . . .	S1	S1	S1	S1
Ambient temp. (°C) . . . . .	40	45	40	45