



GENERAL DATA

Request #00545499

File: A-G_DST_LIGHT_EN_COMPRESSED_SI#545499



PDF-Datasheet

A.1.10.10	Customer references	
FARM	Company	STM Finland
NAME_CUST	Customer contact person	Mikko Valtonen
ADRESS_CU	ST Address	Luoteisrinne 5 - 02270 Espoo (Finland)
A.2.10.10	Product Family	
M_MASTER	Machine_MASTER	STM_HTL_MON_A-G
A.2.10.20	Family Features	
G_CHR_A	Feature No.1	Inline gearboxes and gear motors A
A.3.10.10	Gearbox coding parameters - BASIC	
M	Machine	A
IV	Input Version	M = pre arrangement motor
SIZE	Size	80 = Size_80
MFG	Modular feet	- = Not modular feet
ov	Output Version	F
OF	Output flange	F2
NOR	No. of stages	2 = N° of reductions
IR	Reduction ratio	11.1
IVT	Input Version - TYPE	IEC = IEC - Motor Type
IS	Input shaft	100B5
TOBE	Tapered Output Bearings	- = Standard radial or tapered bearings
TYPSD	Output shaft type	SI = mm
SD	Shaft Diameter	Ø40
MP	Mounting positions	М1
A.3.30.10	OPT - Options - Material of sealing rings	
ОРТ	OPT - Options - Material of sealing rings	- = Seal-Type - STANDARD
A.3.30.20	OPTI - Options - Lubricant supply status	and lubricant technical specifications
OPT1	OPT1 - Options - Oil supply status	INOIL_STD = Gearbox with lubricant STM standard
A.3.30.30	OPT2 - Options - Painting	
OPT2	OPT2 - Options - Painting	TypSTM = Painting and surface protection - Standard STM
A.3.41.10	MOTOR GEARBOXES	
MGBCK	Gear motors - YES/NO	N



All contents, drawings and information in this document are sole property of STM S.p.A.





PDF-Datasheet

PRODUCT DATA SHEET

Request #00545499

File: A-G_DST_LIGHT_EN_COMPRESSED_SI#545499



C.1.10.30	Gearbox - Basic plate data		
n1	Input shaft speed	1400	[rpm]
n2	Output shaft speed	126.23	[rpm]
ir_gear	Transmission ratio	11.1	[Numeric]
TN	Gearbox Nominal Output Torque	766	[Nm]
P1n	Nominal Input Mechanical Power	10.66	[kW]
RD%	Dynamic efficiency	95	[Numeric]
Fr(I/2) n1	Input Nominal Radial Load for Gearbox at I/2 distance	799	[N]
Fr(I/2) n2	Output Nominal Radial Load for Gearbox at I/2 distance	6093	[N]
Fa n1	Input Nominal Axial Load	160	[N]
Fa n2	Output Nominal Axial Load	1219	[N]
Ptn	Thermal Power Rating	15	[kW]

Page C 2 of 5 Legal warnings: LW-2D3D-Stmstar.pdf Email: stm@stmspa.com

Date: 09/08/2022

Website: www.stmspa.com






PDF-Datasheet

Dimensioni **Dimensions Abmessungen**

Section:

Designation

E.0 Designation gearbox:



M (Mashina)	
M (Machine)	Α
IV (Input Version)	M = pre arrangement motor
SIZE (Size)	80 = Size_80
MFG (Modular feet)	- = Not modular feet
OV (Output Version)	P = feet design
OF (Output Flange)	F2 = fixing flange design
NOR (N° of reductions)	2 = N° of reductions
IR (Reduction ratio)	11.1
IVT (Input Version - TYPE)	IEC = IEC - Motor Type
IS (Input Shaft)	100B5
TOBE (Output Bearings - TYPE)	- = Standard radial or tapered bearings
TYPSD (Typ output shaft)	SI = mm
SD (Shaft Diameter)	Ø40
MP (Mounting positions)	M1
OPT (OPT - Options - Materials of Seals)	- = Seal-Type - STANDARD
OPT1 (OPT1 - Options - Scope of the	INOIL_STD = Gearbox with lubricant STM
supply - Options - OIL)	standard
OPT2 (OPT2 - Options - Painting and	TypSTM = Painting and surface protection -
surface protection)	Standard STM
MGBCK (Motor gearboxes - YES/NO)	N = NO - Motor gearboxes
MAR (Marking)	•
MGB (Motor gearboxes)	•
IN (Options inverter)	-
BF (Options balanced winding)	-
POL (Pole n.)	-
TOW (Type of winding)	-
SIZEM (Motor size)	
LEN (Length)	
DV (Design version)	
PMT (Position Terminal Box)	
AVC (Available configurations)	
SDM (Motor shaft diameter)	
F (Flange)	•
HB14 (n° holes flange b14)	-
IP (Protection level)	-
PLATE (Plate)	-
POW (Power)	-
CEP1 (cable entry 1 position motor)	-
CEP2 (cable entry 2 position motor)	-
TOD (Type of duty)	-
TOB (Type of brake)	-
RLP (Release lever position)	-
IPF (Protection level brake)	
DES (Double ended shaft)	



We reserve the right to implement modifications without notice.

Date: 09.08.2022

Page: E 1





PDF-Datasheet

Dimensioni **Dimensions Abmessungen**

Section:	E
----------	---

Designation

> E.0 Designation gearbox:

PC (Cooling)	-
SAVE (Separate power servoventilation)	-
VSAVE (External power supply fan)	-
PSAVE (Separate fan terminal position)	-
CEPV (cable entry position servoventilation)	-
RS (Rain shield)	-
CEPT (Thermal cable entry position)	-
PA (Painting)	-





We reserve the right to implement modifications without notice.


Date: 09.08.2022

Page: E 2

Legal warnings:LW-2D3D-Stmstar.pdf Email: info@stm.com WebSite: http://www.stmspa.com

E.1

General Dimension 2D:

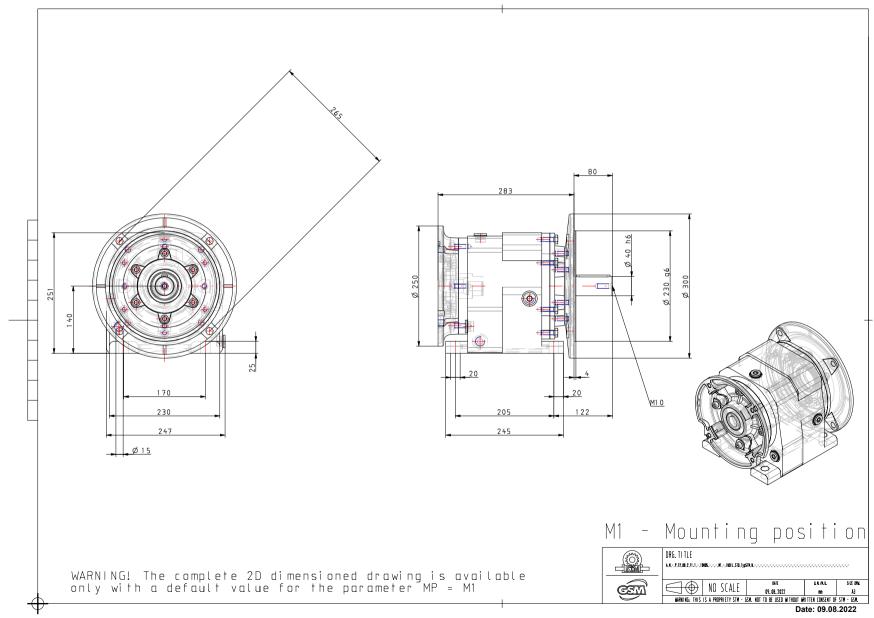

Page: E 3